

“WING” Bench

Sheet code: PAAR085

Drawing code:

Revision: 10/01/2019

Designer:

Arch. Ivan Del Ponte

Arch. Matteo Zambelli

Product: Bench model “WING”, name recalled by its shape, composed by a monolithic seat. The monolithic seat is fastened to a base hidden by the flooring, providing the product with enhanced stability and security.

Dimensions: length: 2411 mm;
width: 650 mm;
maximum height: 630 mm (450 mm above ground);
total weight: 710 kg (308 kg for the basement).

Material: The bench is manufactured in UTC® (Ultratense Concrete®), a material belonging to the UHPC class (ultra-high performance concrete); a high performance concrete material registered by Bellitalia® and supplied in different colours: blue, white and other colours (see material sheet).


Reinforcing: No reinforcing.


Finishing: All surfaces are smooth natural; visible surfaces are covered with a anti-decay coating, or, upon request, with anti-graffiti products. All edges are rounded or made blunt (please see respective material sheet).

Handling: Use appropriate equipment when handling.


Installation: Identify the correct position and prepare a pit to lodge the base. Cast a foundation in lean concrete, paying attention to maintain the height of the final paving when levelling the base. Restore the flooring upon the base with the slabs provided by Bellitalia or with other alternative solutions. (Installation variation: if a bedplate of at least 202 mm is available, it's possible to fasten the element by using thread bars and chemical anchors, without placing the base).

Notes: Slight variations in colour and finishing, as for example micro-cracking, different shades on surfaces or rising of oxides, are natural phenomena related to the products' manufacturing and maturing processes. The colour shown in the samples is just approximate, and different shades of colour shall not be intended as nonconformity of the product. Bellitalia will not accept claims or demands for damages related to colours variations, as they belong to the material's inner characteristics and depend on environmental conditions during the manufacturing and maturing processes.

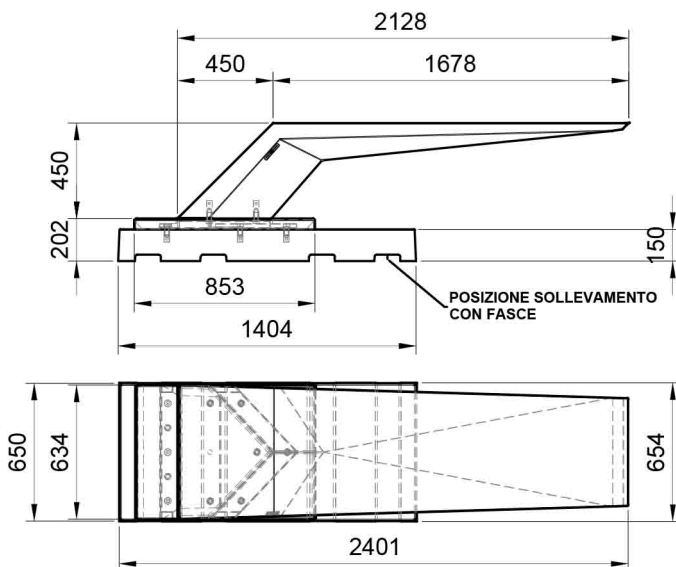

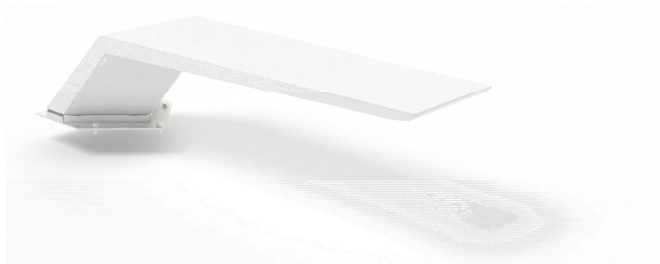

SOLUTION 1: Base with one folded meta sheet.

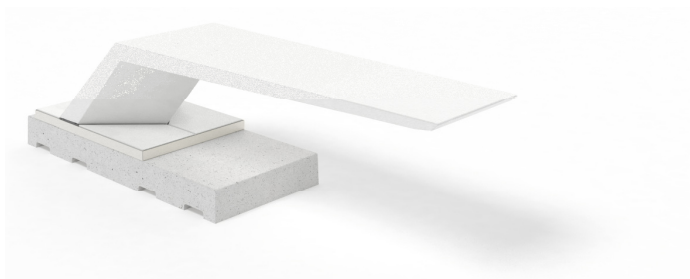

SOLUTION 2: Base with sustaining metal sheet, additional metal sheet to place UTC® slabs, and base in concrete.